

# CERTIFICATE

## of constancy of performance

### 1922 - CPR - 1694

In compliance with Regulation (EU) 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

**Fire detection and fire alarm systems. Heat detectors - Point heat detectors. Short-circuit isolators. Interactive addressable rate of rise heat detector, classes A2R and A2S with built-in line isolator, model: FD7120M, with mounting base 7100**

(with the performance listed, see Annexes I and II to 1922-CPR-1694 that are an inseparable part of this certificate)

placed on the market under the name or trade mark of  
**UniPOS Ltd.**

**47 San Stefano Str., 5800 Pleven, Bulgaria**

and produced in the manufacturing plant of  
**UniPOS Ltd.**

**47 San Stefano Str., 5800 Pleven, Bulgaria**



This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

**EN 54-5:2017+A1:2018 and EN 54-17:2005, EN 54-17:2005/AC:2007**

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

This certificate was first issued on 01.12.2021 and will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address [www.dedal-bg.net](http://www.dedal-bg.net).



Manager:

*Anna Vasileva*



dipl. eng. Anna Vasileva


Issued:  
Burgas, 01 September 2025

Ref. No. 03-00

## ANNEX I TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-1694/01.09.2025

Performance list, acc. to EN 54-5:2017+A1:2018

Essential Characteristics	Performance	Clause
<b>Operational reliability</b>		
- Position of heat sensitive element	Pass	4.2.1
- Individual alarm indication	Pass	4.2.2
- Connection of ancillary devices	Pass	4.2.3
- Monitoring of detachable point heat detectors	Pass	4.2.4
- Manufacturing adjustments	Pass	4.2.5
- On site adjustment of response behaviour	Pass	4.2.6
- Software controlled detectors (when provided)	Pass	4.2.7
<b>Nominal activation conditions/ Sensitivity</b>		
- Directional dependence	Pass	4.3.1
- Static response temperature	Pass	4.3.2
- Response times from typical application temperature	Pass	4.3.3
- Response times from 25 °C	N/A	4.3.4
- Response times from high ambient temperature	Pass	4.3.5
- Reproducibility	Pass	4.3.6
<b>Response delay (response time)</b>		
- Additional test for suffix S point heat detectors	Pass	4.4.1
- Additional test for suffix R point heat detectors	Pass	4.4.2
<b>Tolerance to supply voltage</b>		
- Variation in supply parameters	Pass	4.5
<b>Durability of Nominal activation conditions /Sensitivity</b>		
Temperature resistance		
- Cold (operational)	Pass	4.6.1.1
- Dry heat (endurance)	N/A	4.6.1.2
Humidity resistance		
- Damp heat, cycling (operational)	Pass	4.6.2.1
- Damp heat, steady-state (endurance)	Pass	4.6.2.2
<b>Corrosion resistance</b>		
- Sulphur dioxide (SO <sub>2</sub> ) corrosion (endurance)	Pass	4.6.3
<b>Vibration Resistance</b>		
- Shock (operational)	Pass	4.6.4.1
- Impact (operational)	Pass	4.6.4.2
- Vibration, sinusoidal (operational)	Pass	4.6.4.3
- Vibration, sinusoidal (endurance)	Pass	4.6.4.4
<b>Durability of operational reliability, electrical stability</b>		
- (EMC), immunity (operational)	Pass	4.6.5

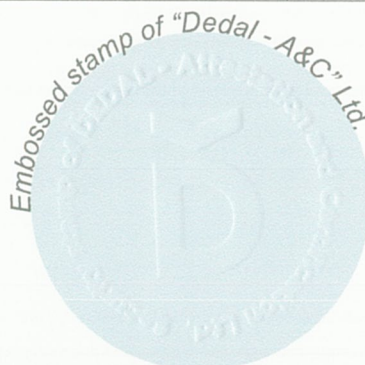

Manager:

*Anna Vasileva*



dipl. eng. Anna Vasileva

Issued:  
Burgas, 01 September 2025

Ref. No. 03-00

## ANNEX II TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-1694/01.09.2025

Performance list, acc. to EN 54-17:2005, EN 54-17:2005/AC:2007

Essential Characteristics	Performance	Clause
<b>Performance under fire conditions</b>		
- Reproducibility	Pass	5.2
<b>Operational reliability</b>		
- Requirements	Pass	4
<b>Durability of operational reliability, temperature resistance</b>		
- Dry heat (operational)	Pass	5.4
- Cold (operational)	Pass	5.5
<b>Durability of operational reliability, vibration resistance</b>		
- Shock (operational)	Pass	5.9
- Impact (operational)	Pass	5.10
- Vibration, sinusoidal (operational)	Pass	5.11
- Vibration, sinusoidal (endurance)	Pass	5.12
<b>Durability of operational reliability, humidity resistance</b>		
- Damp heat, cyclic (operational)	Pass	5.6
- Damp heat, steady state (endurance)	Pass	5.7
<b>Durability of operational reliability, corrosion resistance</b>		
- Sulphur dioxide (SO <sub>2</sub> ) corrosion (endurance)	Pass	5.8
<b>Durability of operational reliability, electrical stability</b>		
- Variation of supply parameters	Pass	5.3
- Electromagnetic compatibility (EMC), immunity tests (operational)	Pass	5.13



Manager:

*Anna Vasileva*



dipl. eng. Anna Vasileva

Issued:  
Burgas, 01 September 2025

Ref. No. 03-00